

SIDE OF POLE MOUNTS


An Industry Standard for Over 20 Years

- Fits pole diameters of 2-inch to 4.5-inch
- Adapts to larger poles, Rohn 25-series towers, or flat surfaces with additional fasteners
- UNI-SPHD/4-90 can only be mounted on a 4-inch schedule 40 pipe
- Maximum total module surface area is 21 square feet
- Fits modules with center to center mounting hole spacing of 19-inches to 39-inches
- Manufactured using heavy-duty corrosion-resistant 5000 series aluminum
- In stock for immediate shipment via ground carriers

| Module Area | ASCE 7-16 Max Wind Speed** |
|---------------|----------------------------|
| 18.33 sq. ft. | 100 MPH |
| 10.65 sq. ft. | 130 MPH |
| 6.83 sq. ft. | 150 MPH |
| 4.81 sq. ft. | 180 MPH |

** Pole size and footing affects wind rating. See our engineering memo for more information.

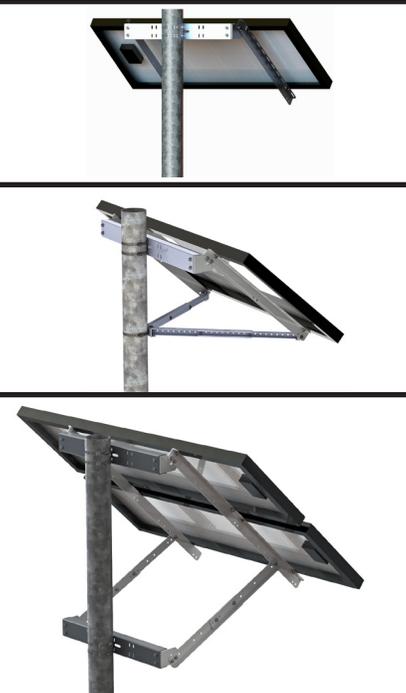

| ITEM # | Maximum Module Area (sq. ft.) | Rail Length (inches) | Module Hole Spacing (inches) | Mounting Pole Size (inches) | Picture |
|-------------|-------------------------------|----------------------|------------------------------|-----------------------------|---|
| UNI-SP/01A | 7 | 27.5 | 18.9 to 28.7 | 2 to 4.5 O.D.* |  |
| UNI-SP/01XH | 7 | 27.5 | 29.2 to 39.0 | 2 to 4.5 O.D.* | |
| UNI-SP/01XX | 7 | 30 | 29.2 to 39.0 | 2 to 4.5 O.D.* | |
| UNI-SP/02 | 14 | 45 | 18.9 to 28.7 | 2 to 4.5 O.D.* | |
| UNI-SP/02A | 14 | 55 | 18.9 to 28.7 | 2 to 4.5 O.D.* | |
| UNI-SP/02X | 14 | 55 | 29.2 to 39.0 | 2 to 4.5 O.D.* | |
| UNI-SP/03 | 21 | 70 | 18.9 to 28.7 | 2 to 4.5 O.D.* | |
| UNI-SP/03W | 21 | 70 | 29.2 to 39.0 | 2 to 4.5 O.D.* | |

* Mount on larger poles, Rohn 25 towers or flat surfaces with additional fasteners